

# PORTAPROMPT UK


Prompting equipment - autocues - teleprompters - teleprompting

## UNIVERSAL SMALL CAMERA RIGGING & MICROPROMPT RIGGING

The Classic Microprompt is the smallest and lightest display in our range, and is ideal for Hand-held prompting where mobility is the key.

We have now added to its versatility by designing lightweight universal rigging for use with Panasonic 3CCD Convertible cameras and similar or the handycam cameras such as the Sony PD150 or Sony PC100E. It can be used in conjunction with any prompting source and single cable operation (power & video) is possible. The Microprompt is now available in two sizes 6.4" and 7.9" to extend its usefulness.

Rigged directly on the camera in seconds, the Microprompt uses an LCD flat display for both minimum size and weight. The result is a highly versatile miniature on-camera head-up display for hand-held, Steadicam shots, confined space locations and now small robotic studios and budget productions. All type can be used with optional Wireless Link and Stroller units.

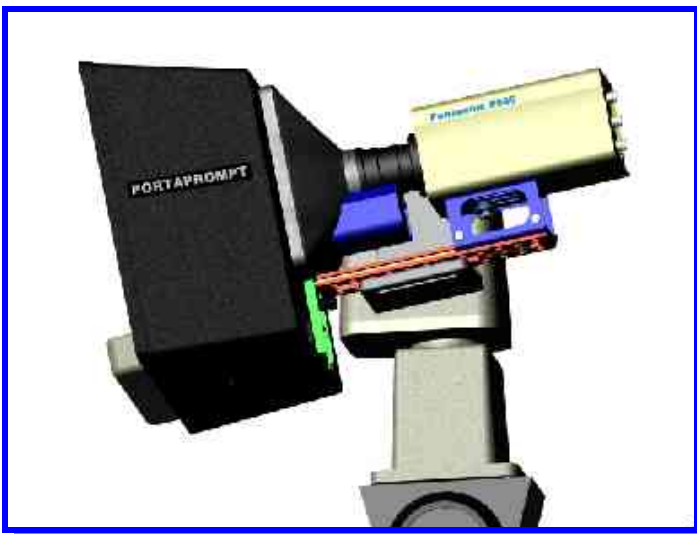

Above is the new universal small camera rigging fitted with the new dual purpose hood. With a weight of less than 2kg for the 7.9" it can be used on medium weight pan and tilt heads.

To the right is the Classic 6.4" Microprompt shown rigged onto an lightweight ENG camera.



Copyright 2004 by Portaprompt Ltd who reserve the right to change product specification at any time

# PORTAPROMPT UK

Prompting equipment - autocues - teleprompters - teleprompting

## MICROPROMPT SPECIFICATIONS

The Classic version is rigged from the Camera handle so is only suitable for shoulder mounted professional style cameras.

The display size is 6.4" only.

The Dual Purpose version can be rigged either from the camera handle on shoulder mounted professional style cameras or rigged on the camera tripod if you are using a semi-professional miniature DV cameras such as the Sony PD150 and the Sony PC100E or the Panasonic Convertible Cameras such as the AW-E600A mounted on the Pan and tilt head or tripod.

There are two display sizes 6.4" or 7.9".

### 6.4" Classic ENG version.

- 6.4" Ultra bright L.C.D.
- Weight: 1.6 Kg.
- Power consumption 11 watts @ 12V D.C.
- Composite video input 1v pp 75ohms.
- Brightness 300 Candelas.
- PAL/N.T.S.C. compatible.
- Removable hood.
- Display itself can be used on desk with its stand.

## Dual Purpose Hood Specifications

### 6.4" ENG Version

- 6.4" Ultra bright L.C.D.
- Weight: 2.0 Kg. DV camera rigging
- Power consumption 11 watts @ 12V D.C.
- Composite video input 1v pp 75ohms.
- Brightness 300 Candelas.
- PAL/N.T.S.C. compatible.
- Removable hood.
- Display itself can be used on desk with its stand.

### 6.4" Universal Small Camera Version

- 6.4" Ultra bright L.C.D.
- Weight: 1.7 Kg. DV camera rigging
- Power consumption 11 watts @ 12V D.C.
- Composite video input 1v pp 75ohms.
- Brightness 300 Candelas.
- PAL/N.T.S.C. compatible.
- Removable hood.
- Display itself can be used on desk with its stand.

### 7.9" ENG Version

- 7.9" Ultra bright L.C.D.
- Weight: 2.15 Kg. DV camera rigging
- Power consumption 10 watts @ 12V D.C.
- Composite video input 1v pp 75ohms.
- Brightness 300 Candelas.
- PAL/N.T.S.C. compatible.
- Removable hood.
- Display itself can be used on desk with its stand.

### 7.9" Universal Small Camera Version

- 7.9" Ultra bright L.C.D.
- Weight: 1.85 Kg. DV camera rigging
- Power consumption 10 watts @ 12V D.C.
- Composite video input 1v pp 75ohms.
- Brightness 300 Candelas.
- PAL/N.T.S.C. compatible.
- Removable hood.
- Display itself can be used on desk with its stand.

Copyright 2004 by Portaprompt Ltd who reserve the right to change product specification at any time

# PORTAPROMPT UK

Prompting equipment - autocues - teleprompters - teleprompting

## MICROPROMPT CABLES

Supplied with the Classic or ENG Version MicroPrompt:-

- **REGULATED AC-DC ADAPTER** - basic power supply for MicroPrompt comprising cable mounted X-CON socket fitted to 12v 2.5 amp power supply.
- **BATTERY LEAD** x 3m - extends power lead from Regulated AC-DC Adapter and for use with battery fitted with an X-CON 4-way connector.
- **BNC TO BNC VIDEO CABLE** x 25m - supplies MicroPrompt with video signal from prompting source.
- **3-WAY CAMERA POWER SPLITTING LEAD** x 0.22m with 1 x 4-pin X-CON plug and 2 x 4-pin X-CON sockets - required if MicroPrompt is to share camera battery power supply.
- **3-WAY COMBINING LEAD** x 0.15m - combines power (from 4-pin plug) and video (from BNC connector) into a 4-pin X-CON socket.
- **COMBINED POWER AND VIDEO LEAD** x 10m - used with 3-way combining lead so that one cable only to MicroPrompt need be used. Up to three combiner leads can be used resulting in 30m cable run.

Supplied with the Universal Small Camera Version MicroPrompt:-


- **REGULATED AC-DC ADAPTER** - basic power supply for MicroPrompt comprising cable mounted X-CON socket fitted to 12v 2.5 amp power supply.
- **BNC TO BNC VIDEO CABLE** x 25m - supplies MicroPrompt with video signal from prompting source.
- **3-WAY COMBINING LEAD** x 0.15m - combines power (from 4-pin plug) and video (from BNC connector) into a 4-pin X-CON socket.

Copyright 2004 by Portaprompt Ltd who reserve the right to change product specification at any time


# PORTAPROMPT UK

Prompting equipment - autocues - teleprompters - teleprompting

## MICROPROMPT PICTURES

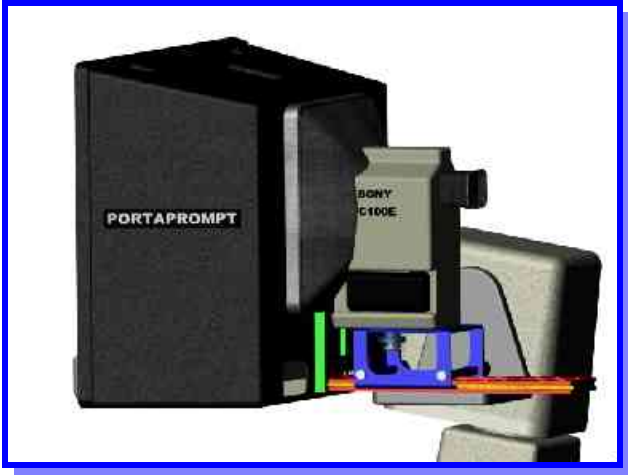

An image of the Universal Small Camera rigging shown mounted on a pan and tilt head with a Sony PC100E.

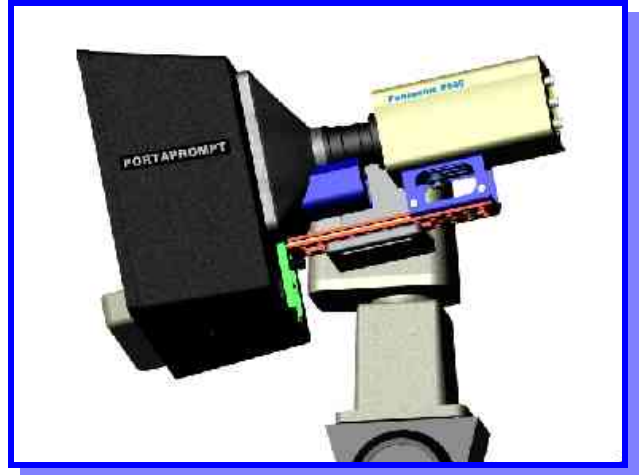

An image of the Universal Small Camera rigging shown mounted on a pan and tilt head with a Panasonic AW-E600 Convertible Camera.



Photo of the Classic Microprompt rigging showing mounting on the carrying handle.



An image of the Universal Small Camera rigging shown mounted on a tripod with a Sony PD150 Camera.

Copyright 2004 by Portaprompt Ltd who reserve the right to change product specification at any time