


RC-3000

GROUP 2

Master Programmable Remote Control



The Kramer **RC-3000** is a Master Programmable Remote Control System, designed for broadcast and industrial studio applications. It can control the latest Kramer switchers and can be easily upgraded to be used with future Kramer switchers. The **RC-3000** can create, using the built-in RS-232 and RS-485 interfaces, any configuration consisting of one PC, up to 15 remote controllers and up to 15 switchers. It can control a stand-alone switcher or can be a part of a system, controlling and reflecting the status of all connected devices. The **RC-3000** itself may be activated, or an internal pre-set recalled, using dry contact-closure control. It can control up to 128 inputs/outputs combinations. The **RC-3000** can address the individual functions of the connected devices, such as crosspoint connections, audio follow video or breakaway, etc. It can internally store and recall various setups for convenient and instant studio control. The unit may be rack or desktop mounted due to its shallow-profile and 19 inch design. It is operated by a 12VDC power source, qualifying it for field operation.

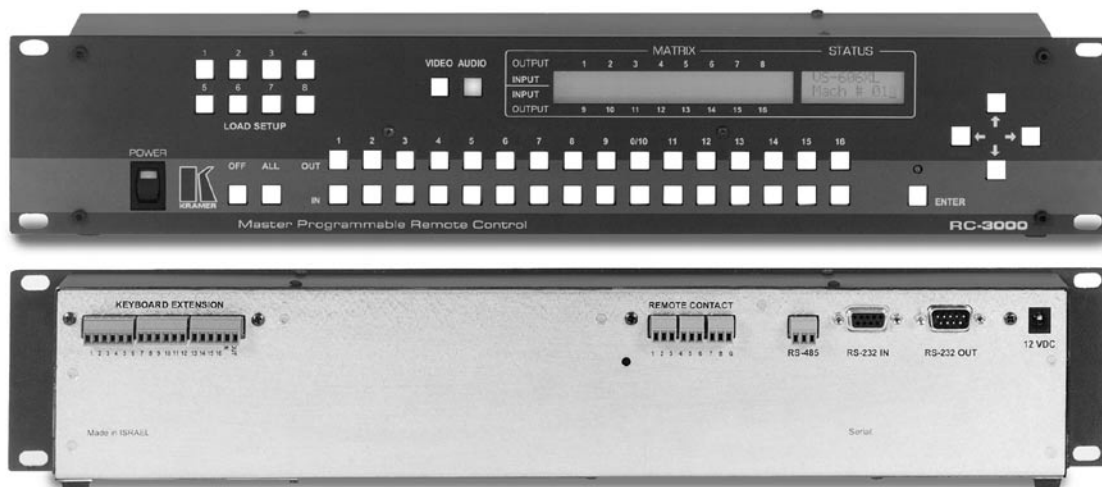

TECHNICAL SPECIFICATIONS

INPUTS/OUTPUTS:	2 x RS-232dB-9 in/out connectors. 1 x RS-485 connector on detachable terminal blocks. 9 pole, remote dry-contact connector on detachable terminal blocks. 18 pole, keyboard extension connector on detachable terminal blocks.
SETTING MEMORY:	8 immediate setups for fast access and retrieval.
CONTROL:	Front panel keys, RS-232, RS-485, contact closure switches, external keyboard.
POWER SOURCE:	12 VDC, 800 mA.
DIMENSIONS:	19 inch (W), 2 inch (D), 2U (H) rack mountable.
WEIGHT:	1.7kg. (3.8 lbs.) approx.
ACCESSORIES:	Windows® - based control software.

TYPICAL APPLICATIONS

- Video production and duplication studios.
- Live broadcasting and editing.

2.103

